




NEW

ocenergycomplete.com

# SYSTEM R-VALUE RECOMMENDATIONS

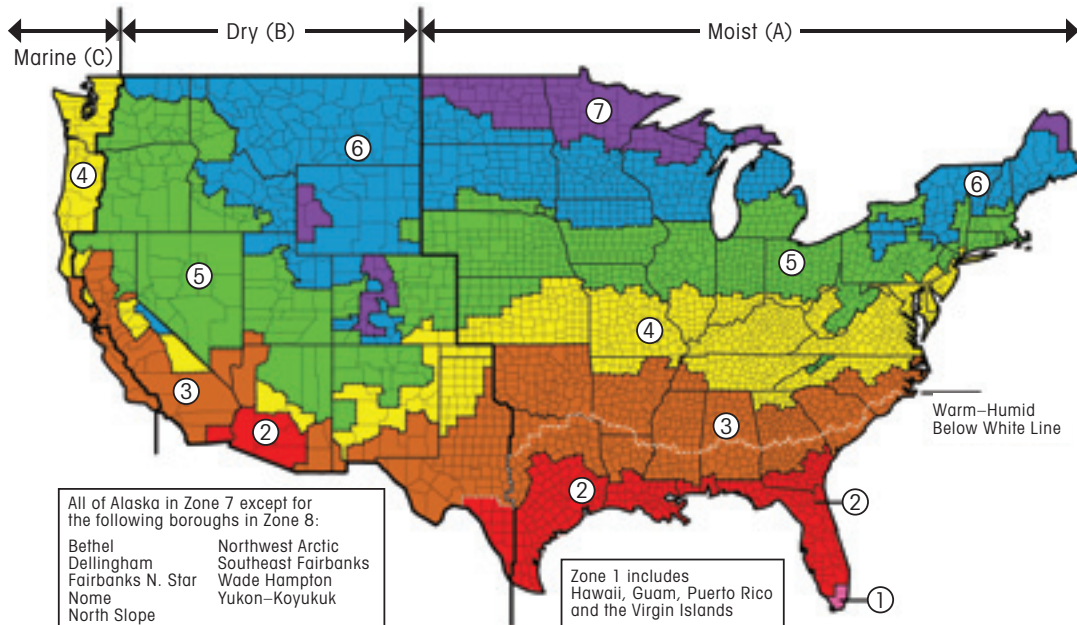

Zone	Attic	Cathedral Ceiling	Wood-Framed Wall – 2x4 <sup>A</sup>	Wood-Framed Wall – 2x6 <sup>A</sup>	Mass Wall <sup>B</sup>	Floor	Crawl Space <sup>C</sup>	Slab Edge	Basement Wall <sup>D</sup>
1	R-38	R-30	R-15+0	R-23+0	R-15/5	R-19	R-19	—	—
2	R-38	R-30	R-15+0	R-23+0	R-15/5	R-25	R-19	—	R-15/10
3	R-49	R-38	R-15+5	R-23+0	R-15/5	R-25	R-25	—	R-15/10
4 except Marine	R-49	R-38	R-15+5	R-23+0	R-15/5	R-25	R-25	R-12.5	R-15/10
5 and Marine 4	R-49	R-38	R-15+5	R-23+0	R-23/15	R-30	R-30	R-12.5	R-23/12.5
6	R-49	R-38	R-15+10	R-23+5	R-23/15	R-38	R-30	R-12.5	R-23/12.5
7	R-60	R-38	R-15+10	R-23+5	R-23/20	R-38	R-30	R-12.5	R-23/12.5

**NOTE:** Contact your local building department to check for local code requirements.

A The first R-value is for cavity insulation and the second is for insulated sheathing.

B Choose interior (first value) or exterior (second value) recommendation.

C Crawl space walls are only insulated if the crawl space is unvented and the floor above the crawl space is uninsulated.

D Choose interior (first value) or exterior (second value) recommendation.